

PRINT MOUNTING POSITIONER


FALCON
 Instructions for Use

1




IMPORTANT: Horizontal (top) scale is read **BOTH** left and right, with "0" as center point.
 Place print in upper right hand corner of mount board.
 Slide Positioner across top of board until number readings at points A & B (left side of mount board and left side of print) are identical.
 Hold Positioner in place.

2

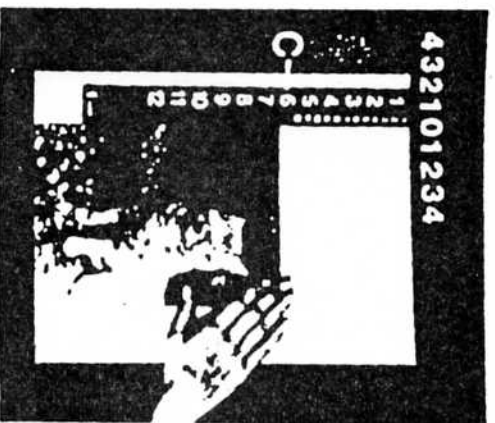

Slide print flush against Positioner and down to bottom of board. Note reading on vertical **LARGE NUMBER** scale at **TOP** of print — point C.

3

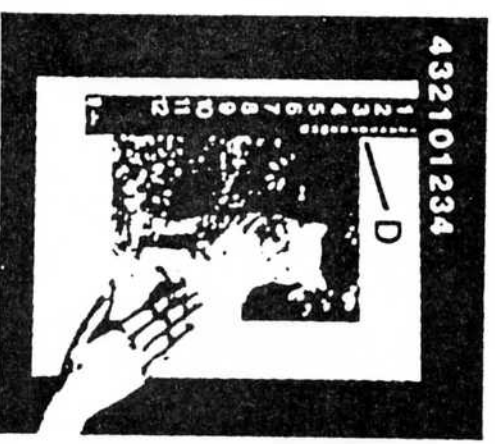

Keeping print flush against Positioner, slide it up until **TOP** of print reaches the same number on the **SMALL NUMBER** scale — point D.
 You have now located the perfect position for mounting your print.

After applying adhesive (we recommend Falcon Perma/Mount™ 2 Dry Mount Cards or Spray Adhesive) hold Positioner in place and gently lay print against Positioner with top of print at the proper number, as determined above, on the small number scale. Smooth out print on mount board for a firm grip.

Falcon Safety Products, Inc.
 Branchburg, N.J. 08876 U.S.A. ©

